
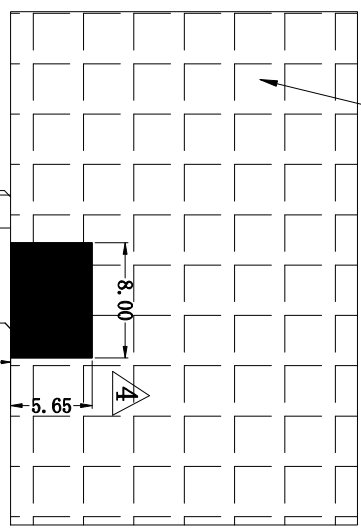
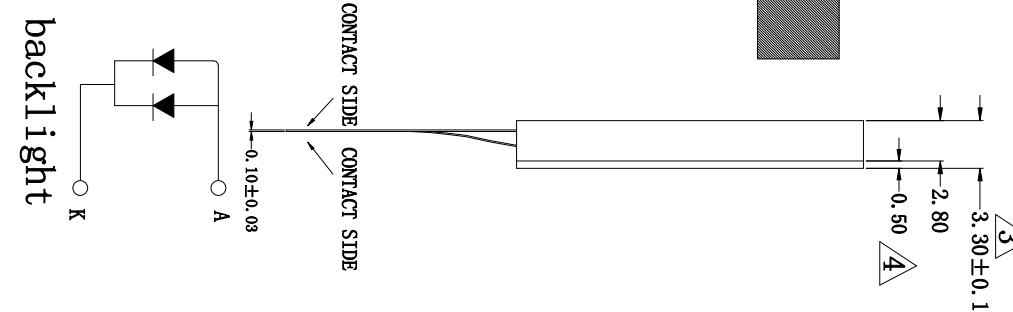


Customer:


Customer NO.:

Customer Approve By:

REV.	DESCRIPTION OF MODIFY	MODIFY BY:	DATE
A0	1 ST DESIGN	CS	18.1.22
A1	修改FPC长度和背光金手指焊接位置	CS	18.2.24
A2	加大EVA面积, 布满背光底部	CS	18.3.01
A3	更改EVA厚度, 从0.5mm调整为0.8mm	CS	18.4.28
A4	EVA厚度根据做货实物改为0.5, 包头腰尺寸增加。	CS	190610

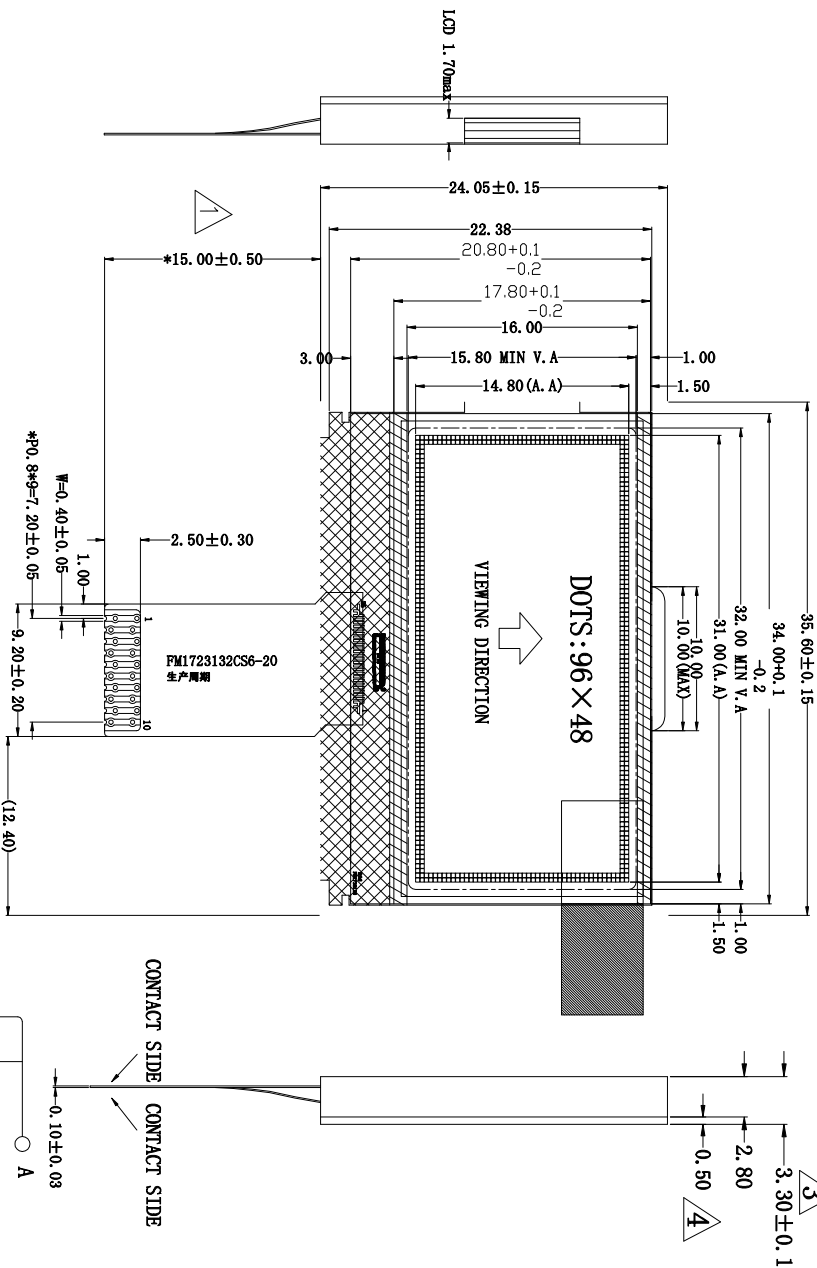

单面带胶EVA (正面为亮面海绵)

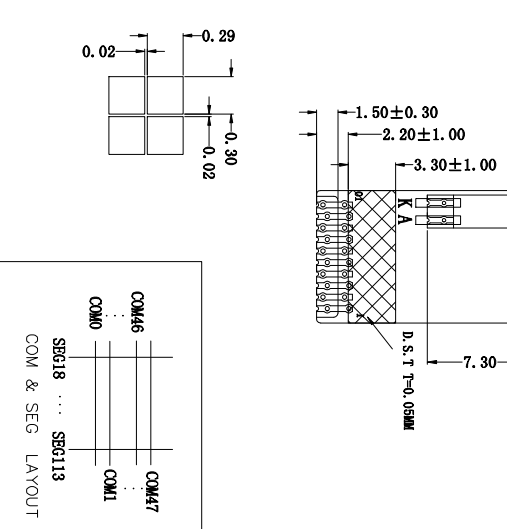

1	V0
2	VSS
3	VDD
4	SDA
5	SCLK
6	A0
7	RST
8	CSB
9	A
10	K

NOTES:

1. DISPLAY TYPE: FSTN/POSITIVE
2. OPERATING VOLTAGE: 3.0V
3. OPERATING TEMPERATURE: -20°C~70°C
4. STORAGE TEMPERATURE: -30°C~80°C
5. DRIVE MODE: 1/49 DUTY, 1/8BIAS
6. VIEWING DIRECTION: 6:00
7. POLARIZER TYPE: TRANSPARENT
8. CONNECTOR: COG/ST7567S
9. CUSTOMER No.: 64HZ
10. FREQUENCY: 64HZ

11. Unassigned tolerances ±0.20.
12. BACKLIGHT: WHITE EDGE LED (X2) VF=3.0V, IF=30mA

深圳市鑫美芝实业有限公司
Shenzhen XinMeiZhi INDUSTRY CO., LTD

UNIT: MM SIZE: A4
SHEET: 1 OF 1

LCM NO. ME32 (MF964832) DWG NO. : REV: A4

DRAWN BY : CHECKED BY : APPROVED BY :