Customer:	Customer NO.:	Customer Approve By:

REV.	DESCRIPTION OF MODIFY	MODIFY BY:	DATE
A0	1'ST DESIGN	TGG	2014-5-20
⚠1 A1	背光源左右缺口处增加挡墙	TGG	2015-3-26

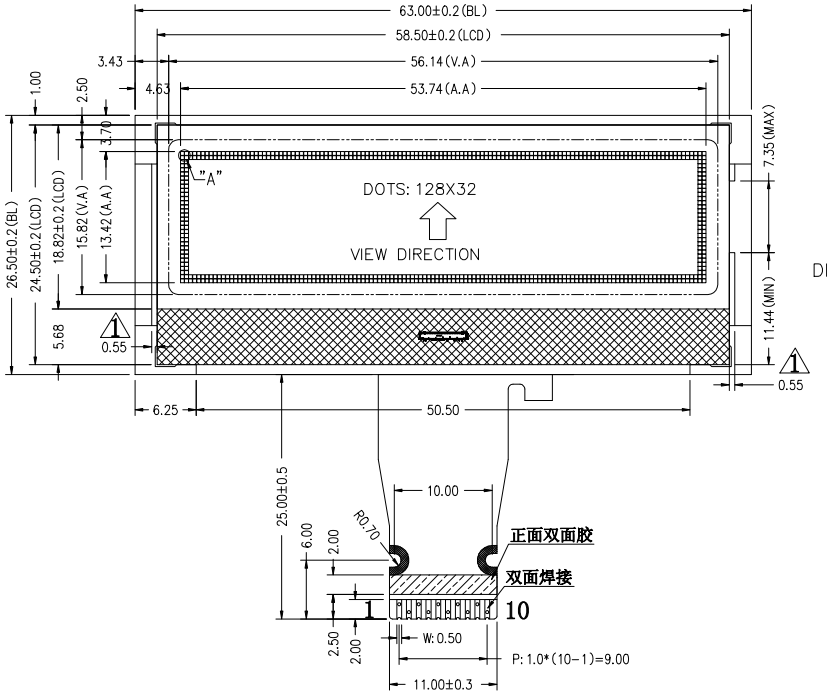

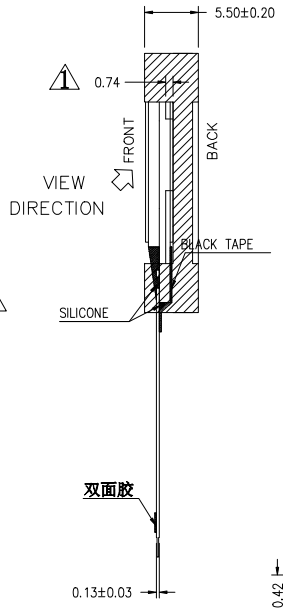

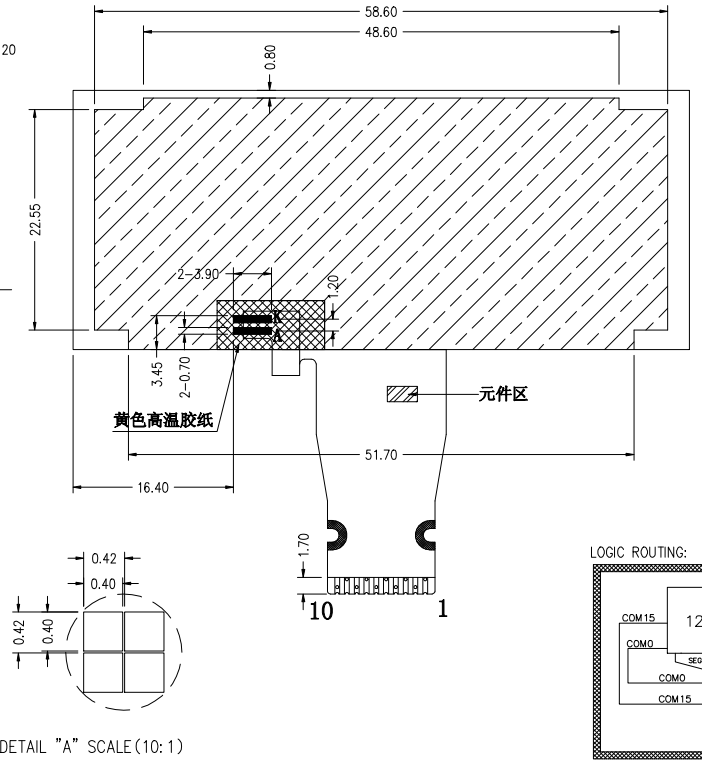

DETAIL "A" SCALE(10:1)

PIN	DESC
1	VG
2	GND
3	VDD
4	SDI
5	SCLK
6	A0
7	/RES
8	/CS1
9	LEDA
10	LEDK

LOGIC ROUTING:



Note:

1.Display Modle:	FSTN/POSITIVE
2.Driving Condition:	1/32Duty,1/6Bias; VDD=3.3V,VLCD=6.2V
3.Viewing Direction:	6:00 o'clock
4.Operating Temp:	−10~+60°C
Storage Temp:	−20~+70°C
5.LCD Connector:	COG/LCD+IC+FPC+BL
6.IC:	ST7567
7.Backlight:	**White LED（灯色白光）**

8.Unspecified tolerance is ±0.20mm

9.RoHS Request

深圳市鑫美芝实业有限公司				CD	
				UNIT: MM	SIZE: A4
				SHEET: 1 OF 1	
LCM NO.: XMZ1283240		DWG NO.: XMZ1283240		REV: A1	
ME:		EE:		APPROVED BY :	