
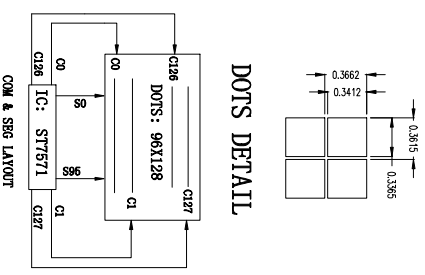
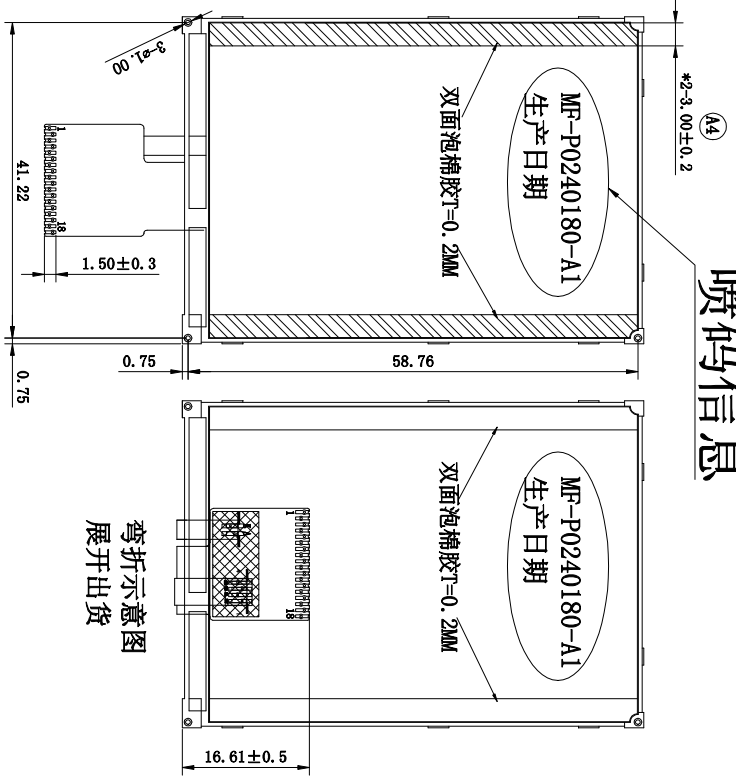


Customer: _____ Customer NO.: _____ Customer Approve By: _____


REV.	DESCRIPTION OR MODIFY	MODIFY BY:	DATE
A0	1 ST, DESIGN	LXY	2019-02-19
A1	更改排线外形和接口定义	LXY	2019-02-21
A2	更改LCD和背光	LXY	2019-03-01
A3	更改排线长度和弯折区	LXY	2019-04-15
A4	更改LCD FPC定义及公差	LXY	2019-04-18
A5	更改FPC和PIN定义, 增加喷码	LXY	2019-04-20

喷码信息

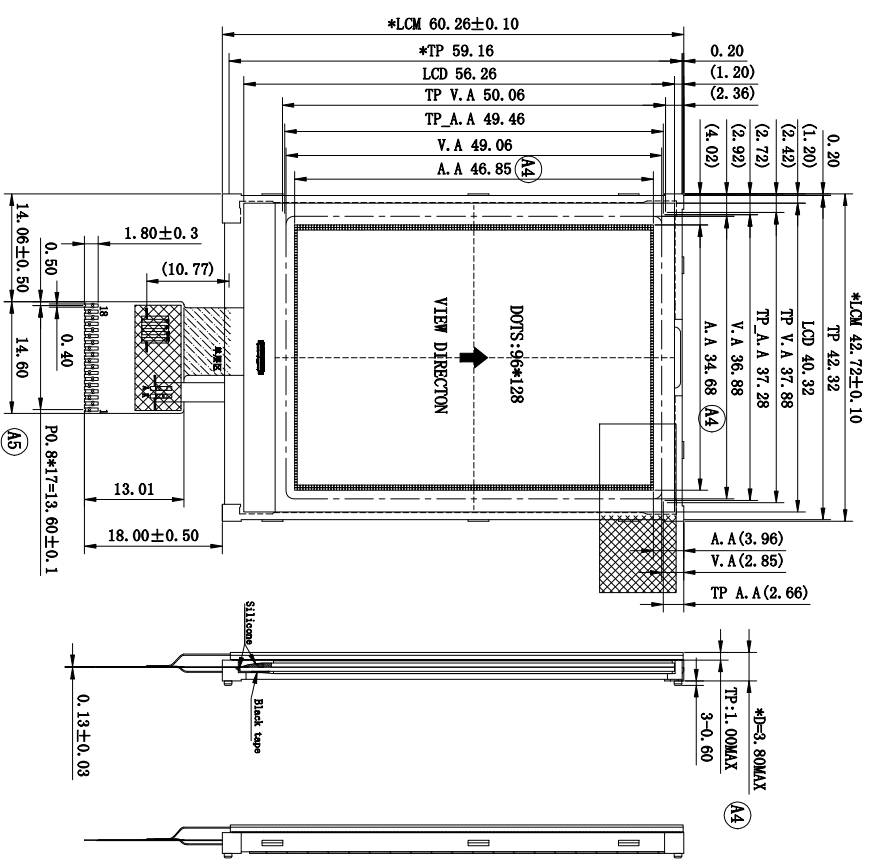

NOTES:

1. DISPLAY TYPE: FSTN/POSITIVE
2. OPERATING VOLTAGE: VDD=3.3V, VLCD=12.0V
3. OPERATING TEMPERATURE: -0°C~50°C
4. STORAGE TEMPERATURE: -10°C~60°C
5. DRIVE MODE: 1/129D, 1/111B
6. VIEWING DIRECTION: 6:00
7. POLARIZER TYPE: TRANSPARENT
8. CONNECTOR: COG/ST7571
9. CUSTOMER No.: 2.4寸(评估图)
10. Unassigned tolerances ±0.20mm
11. BACKLIGHT: WHITE EDGE LED (X3) VF=3.0V, IF=40mA



NO.	DESCRIPTION
1	LED-K
2	VCC
3	CS
4	RST
5	A0
6	SCK
7	GND
8	SDA
9	VD1
10	GND
11	VMO
12	VO
13	VX0
14	VG
15	YU
16	XL
17	YD
18	XR

深圳市鑫美芝实业有限公司

ShenZhen XinMeiZhi Technologies Limited

UNIT: MM	SIZE: A4
SHEET: 1	OF: 1
CD	

DRAWN BY :	CHECKED BY :	APPROVED BY :
LCM NO.: MF96128-240A5	DWG NO.: MF96128-240A5	REV: A5